



## Dflow kit with underslung tank for forage loader wagons.

Designed for loader wagons where it is not possible to mount a tank in a safe accessible place. The underslung tank has a sump and a filler port that can be used to fill it more safely from ground level. There is also a low level switch that will alert the operator, via the control box, when the tank is nearly empty and needs to be re filled.

400 litre tank with sump

Covered pump module.

Control box with digital display.

Electronic flow sensor.

Low levels indicator.

Filler port

Easy set-up function. Pause pump via wagon control (If available)

Thru beam crop detection option.

Flow rate options

Dflow LV      *0.50 to 5.0 litres per minute*  
Dflow HV      *1.00 to 10.0 litres per minute*

## Simple operation



## Digital Control

The control box automatically monitors and adjusts the pump to keep it's output constant, this enables the pump to deliver additive precisely.

## Easy to set-up and operate


Enter the application rate of your additive in litres per tonne.

Set how many tonnes an hour are picked up

The total litres dispensed are stored in memory and can be zeroed.



400 litre tank with sump dimensions

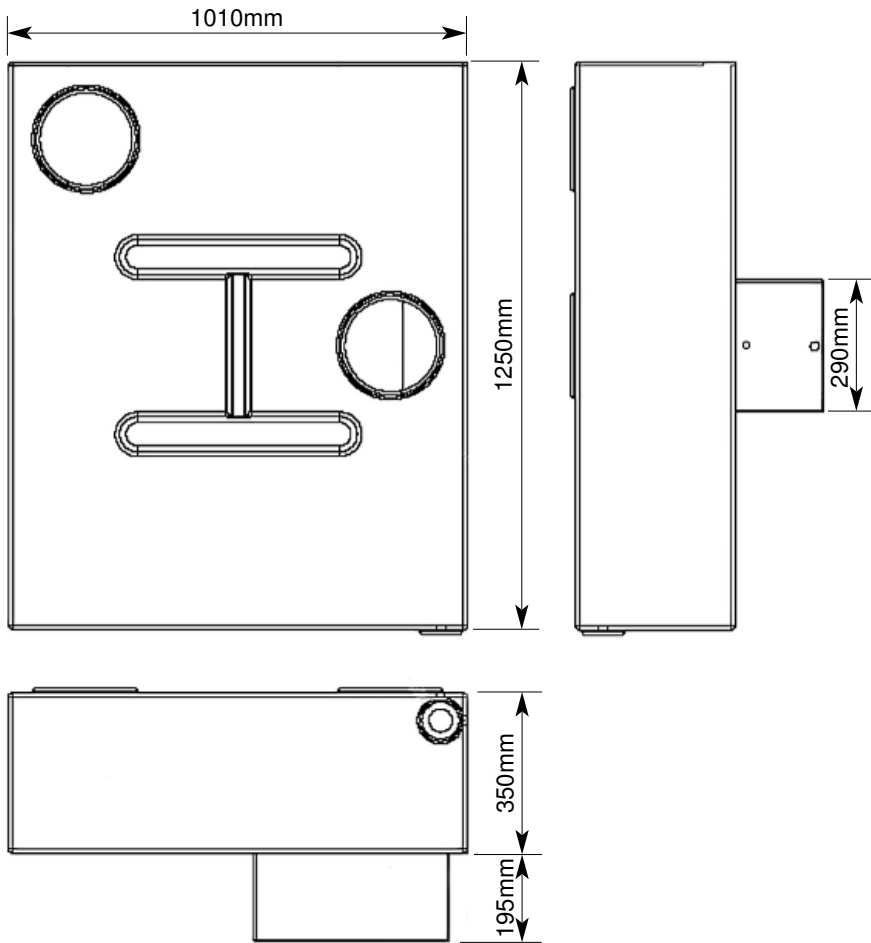

Dflow Module dimensions

