

For balers, forage wagons and harvesters



Control box with digital display

Easy set-up function

Digital flow sensor

125, 175 or 250 litres translucent tank

Pump chamber cover

3 way valve with drain tube

Tilting rigid steel bracket

Thru beam crop detection option

Flow rate options

Dflow UV 0.10 to 1.0 litres per minute

Dflow LV 0.50 to 5.0 litres per minute

Dflow HV 1.00 to 9.0 litres per minute



Digital Control

The control box automatically monitors and adjusts the pump to keep it's output constant, this enables the pump to deliver additive precisely.

Simple operation

Settings for baler

Set you bale weight in Kg per Bale

Enter the application rate of your additive in litres per tonne.

Set how many bales made in an hour



A thru-beam crop sensor can be used with the Selmech control box to automatically turn the pump on and off.


The total litres dispensed are stored in memory and can be zeroed.



Settings for harvester or wagon


Enter the application rate of your additive in litres per tonne.

Set how many tonnes an hour are picked up




Tilting bracket




The mounting bracket tilts and can be switched to give multiple mounting positions

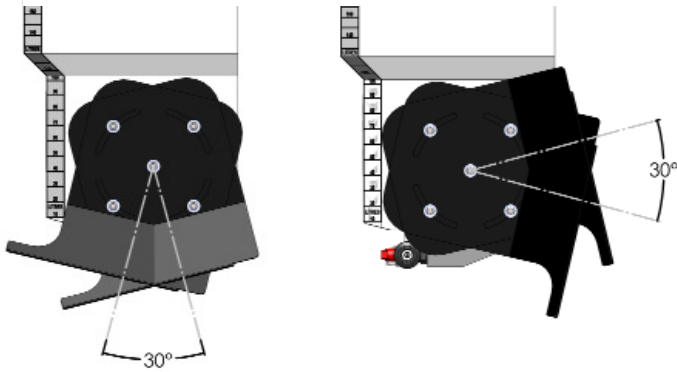

Tank Dimensions

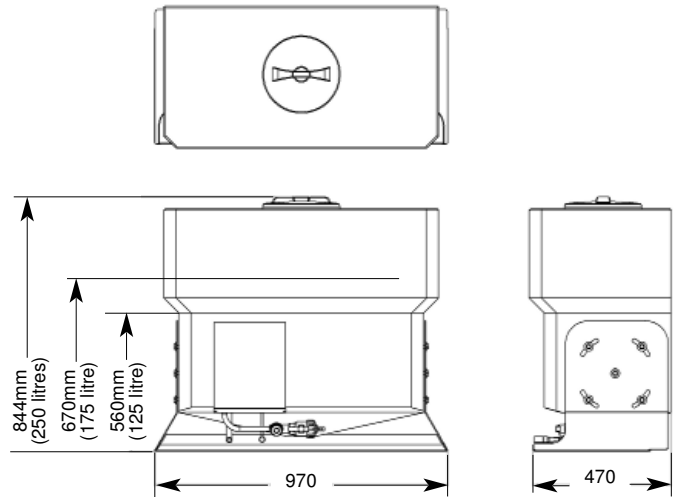

Mounting holes

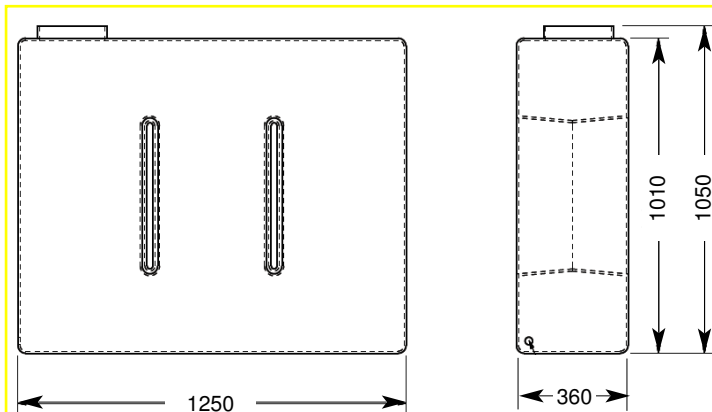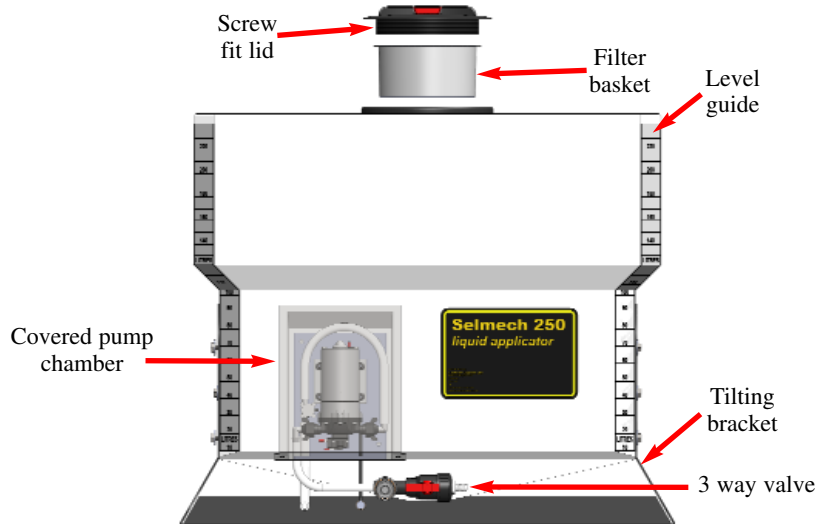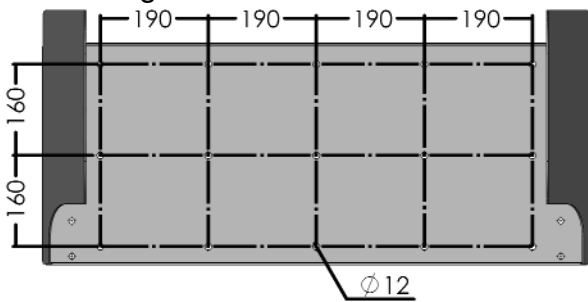

Selmech can also supply a 400 litre tank to be used in conjunction with a Dflow pump module .

Please note the tank does not come with any mounting brackets.

